
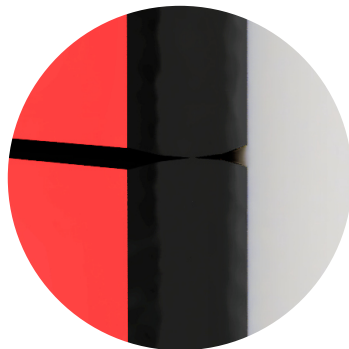


IPS Duct System Specification Range - Extremus


Manufacturer
 Inscape Interiors Limited
 Unit 1, Lower Healey Business Park
 Froom Street, Chorley
 PR6 9AR
 Tel: 01257 249090
 Email: info@inscapepeople.co.uk

- “Panels:**
- Type: Manufacturers standard.
 - Core material: Solid grade laminate.
 - Thickness: 12/13mm depending on laminate brand.
 - Facings: Coloured compact faced both sides.
 Colour / Finish: TBC from Inscapes offered colour brochure.
 - Edge Treatment: Radiused and Polished
- “Fasteners:**
- Type: Concealed Heavy Load Accessible KEKU Suspension Clipping System
- “Frame:**
- Core material: Moisture resistant MDF
 - Thickness: 25mm.
 - Facings: Decorative high pressure laminate (HPL) face and balancer to rear.
 Colour / Finish: TBC from Inscapes offered colour brochure


- “Options:**
- Box Unit frames are free standing and manufactured from 25mm MR MDF with decorative laminate face and balancer to rear.
 - Extremus Speedfix; 12/13mm SGL Panels pre-mounted to timber ladder frame installed on a 27mm decorative frame.
 - Extremus Hinged; 12/13mm SGL Panels pre-mounted to timber ladder frame with access panels (800mm high max) hinged and installed on a 27mm decorative frame.
 - Pre-Plumbed; Sanitary ware, where appropriate, is pre-mounted to panels ready for final connection on site. Please contact us for more details.

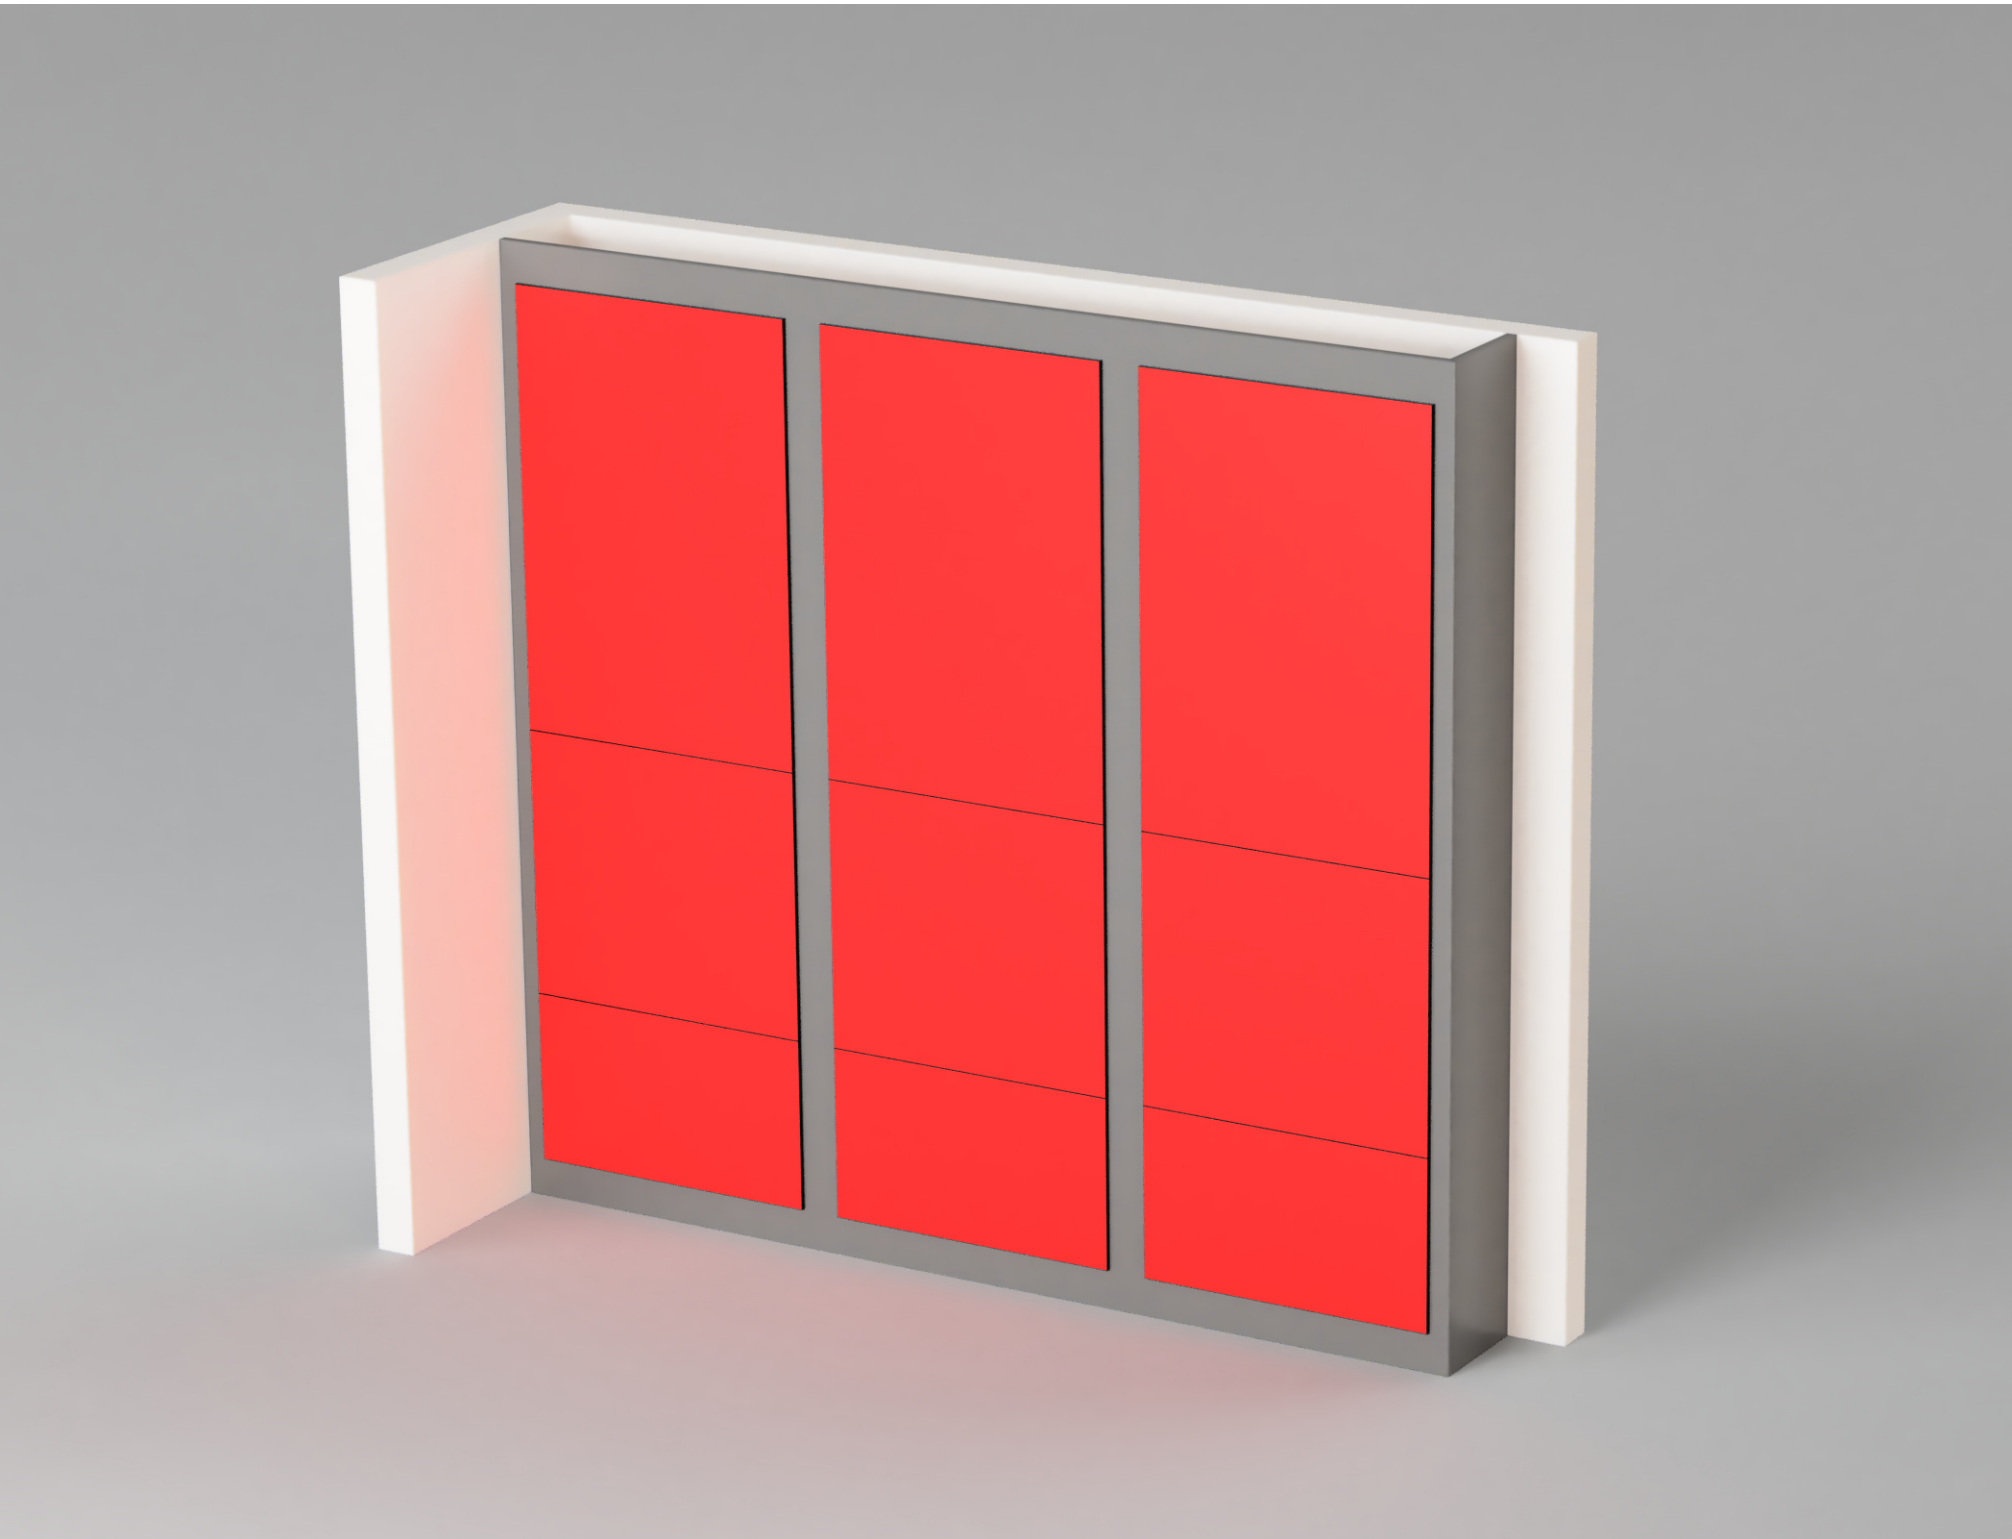

Crescent Edge Polished Profile

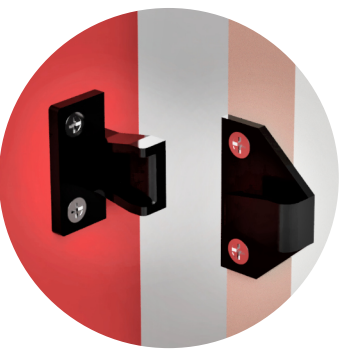

“Keku” Open Push Clip

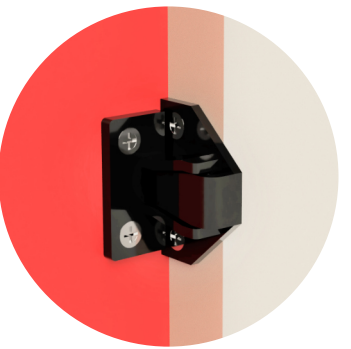


“Keku” Closed Push Clip



“Keku” Hook Clip



“VELA” Vertical Sash Hinge (Upgrade Option)

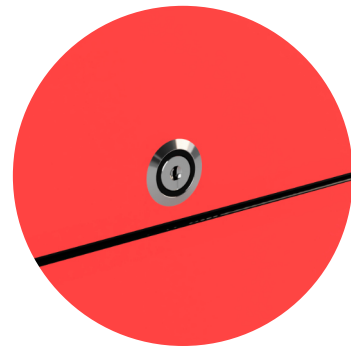

Hinged access panel lock (Optional Extra)

