IPS Duct System Specification Range - Extremus EXS Box Unit

Manufacturer
Inscape Interiors Limited
Unit 1, Lower Healey Business Park
Froom Street, Chorley
PR6 9AR
Tel: 01257 249090
Email: info@inscapepeople.co.uk

“Panels:
- Type: Manufacturers standard.
- Core material: Solid grade laminate.
  Thickness: 12/13mm depending on laminate brand.
- Facings: Coloured compact faced both sides.
  Colour / Finish: TBC from Inscapes offered colour brochure.
- Edge Treatment: Radiused and Polished

“Fasteners:
- Type: Concealed Heavy Load Accessible KEKU Suspension Clipping System

“Frame:
- Core material: Solid grade laminate.
  Thickness: 12/13mm depending on laminate brand.
- Facings: Coloured compact faced both sides.
  Colour / Finish: TBC from Inscapes offered colour brochure

“Options:
- Extremus Hinged; 12/13mm SGL Panels pre-mounted to timber speed frame with access panels (800mm high max) hinged and installed on a 27mm decorative frame. The hinges operate with a 125° opening angle, 3 dimensional front adjustment, depth adjustment and tool free panel removal.
- Pre-Plumbed; Sanitary ware, where appropriate, is pre-mounted to panels ready for final connection on site. Please contact us for more details.

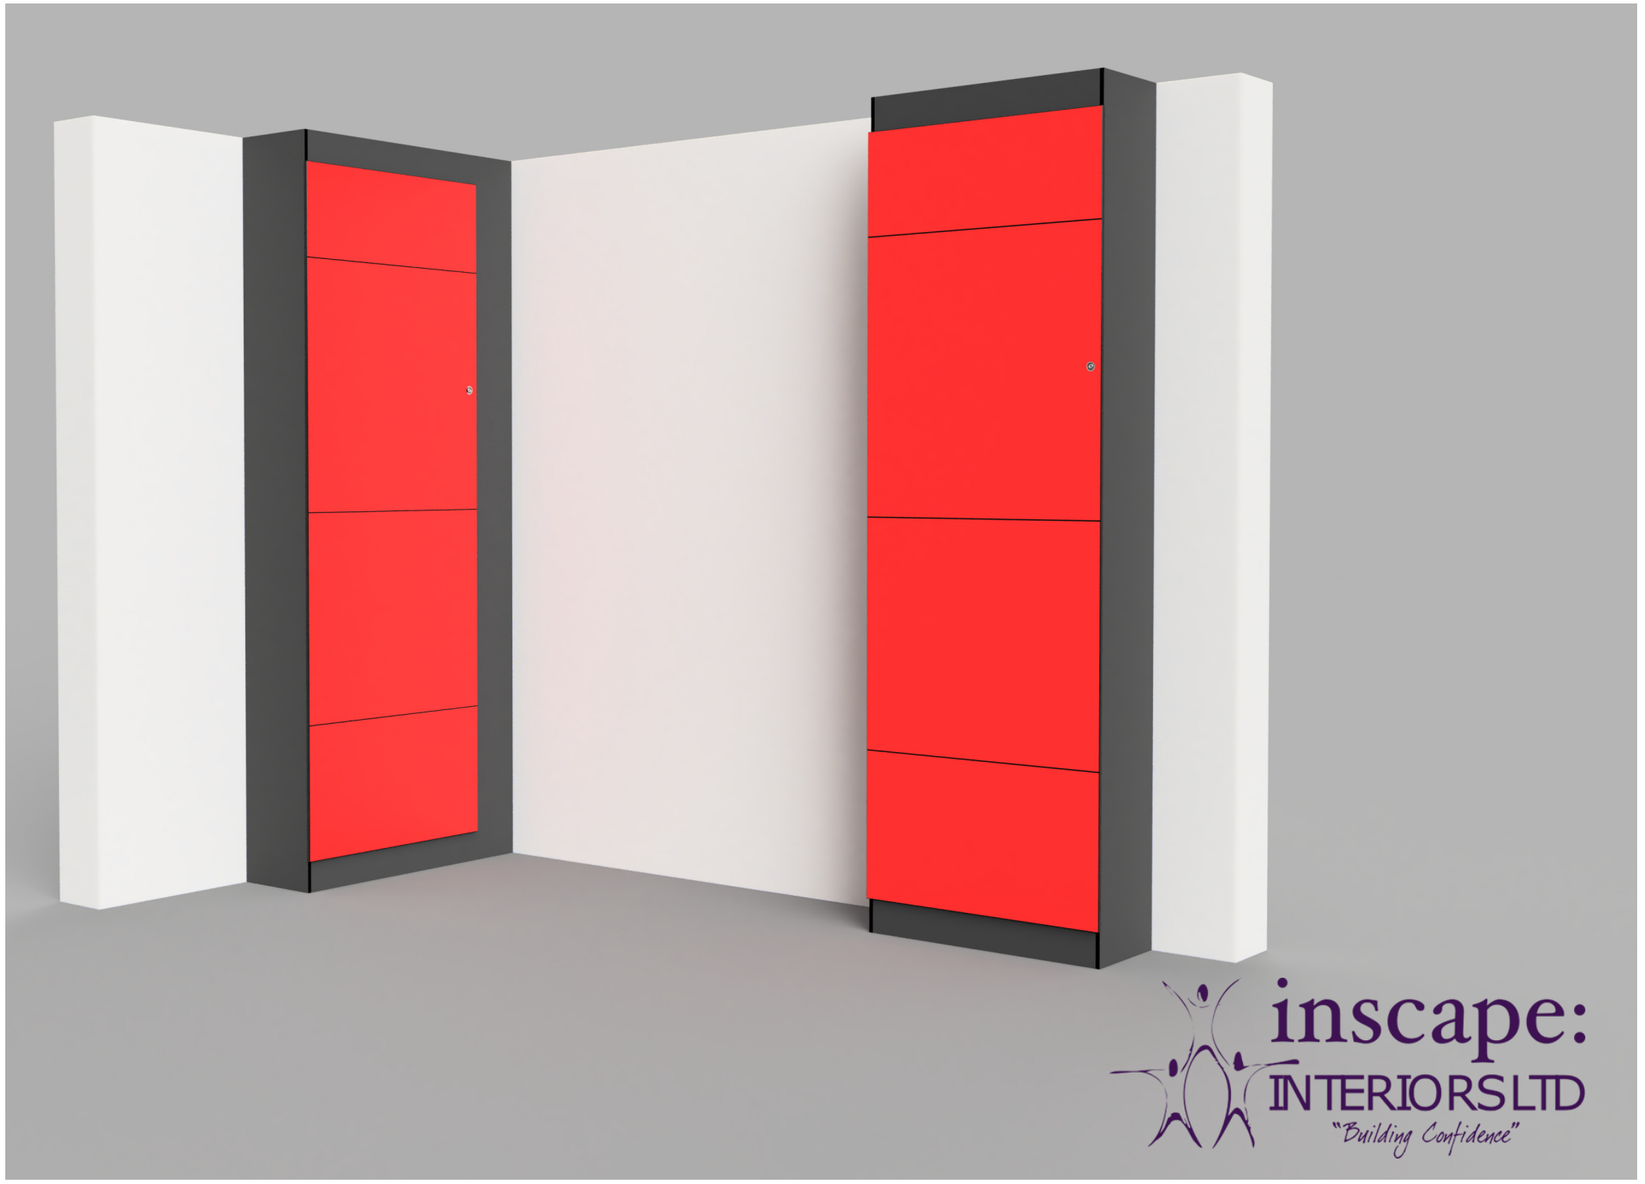

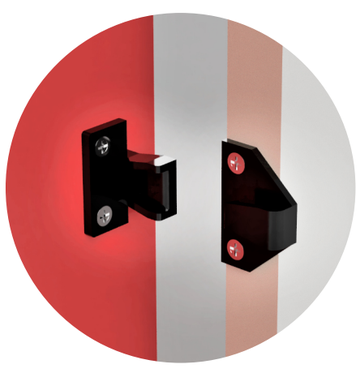
Push Clip


Hook Clip


125° Hinge


“Horizontally Hinged Panel
(Upgrade Option)


Horizontal Hinges
(Upgrade Option)

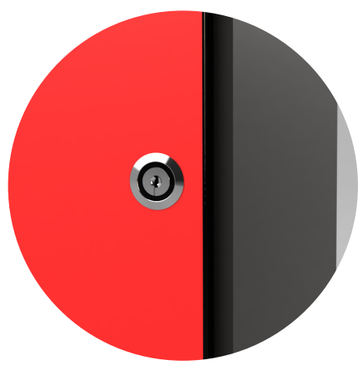
Hinged access panel lock